

● Digilux Fluorescent Lights




Digilux 455
#100010
(Four Lamps-55 watts each)




Digilux 436
#100020
(Four Lamps-36 watts each)

Colour corrected light
Flicker free
Provided with reflective barn-doors

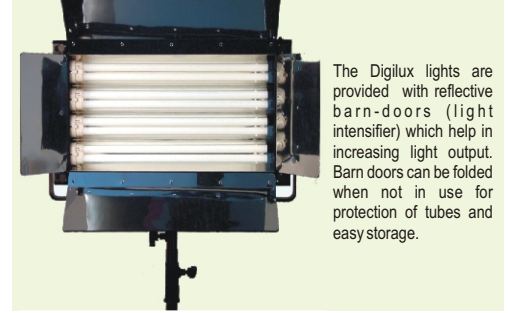

The Digilux lights are provided with reflective barn-doors (light intensifier) which help in increasing light output. Barn doors can be folded when not in use for protection of tubes and easy storage.

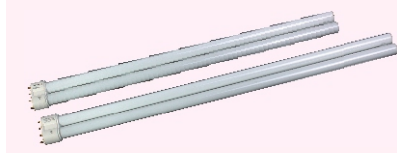

Colour Corrected Fluorescent Tubes
(36 Watts & 55 Watts)
#100025A & 100015A (5300 K)
#100025B & 100015B (3000 K)



Diffuser
#100014 & 100024
Fabric diffuser can be used to further soften the light output.

● Quadlux / Trilux Fluorescent Lights



Trilux
#100030



Quadlux
#100031

Soft continuous lighting using spiral CFLs - ideal for digital photography (passport pictures, portraits, product photography etc.)



	QuadLux	TriLux
Lamp & Power :	Four Compact 27 watt spiral lamps	Three Compact 27 watt spiral lamps
Lux at 0.9m (3ft) :	1700	1320
Lamp Socket :	B22	B22
Operating Voltage :	220 V AC	220 V AC
Weight (without lamps) :	1.5 Kg	1.4 Kg
Reflector Diameter :	37 cm	37 cm

● Tungsten Lighting



Studio Light NM
#20020

● Video Lights



Video Light VL - 1000
with Dimmer #110011

Video Light VL - 1000
#110010

Rated for Continuous Use

● Accessories for Video Lights




Adapter Bush
110020

The Adaptor Bush enables a Video Light to be mounted on to any HARISON light stand. It is provided with a 1/4" threaded pin. The Adaptor Bush fits onto the spigot of the light stand (Pic. 1 & 2). The Video Light is then mounted on the threaded pin of the Adaptor (Pic. 3).



Tilting Bracket

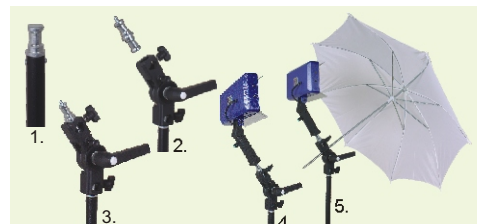

The Tilting Bracket can be fixed on top of any HARISON light stand (Pic. 1 & 2). A Double Sided Spigot is then fitted on to the bracket (Pic. 2 & 3). A Video Light can be mounted on the 1/4" threaded pin of the Double Sided Spigot (Pic. 4). The Tilting Bracket can also accept an umbrella (Pic. 5).