



DIMENSIONS

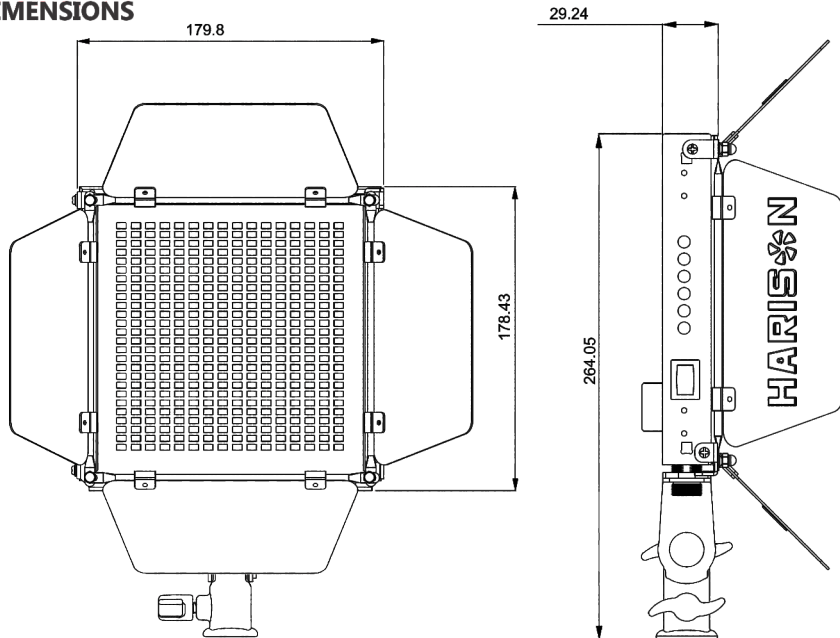

Weight : 1.05 Kg (2.3 lbs.)

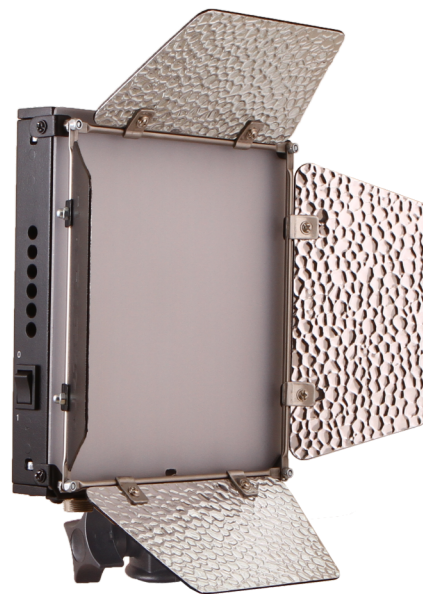


Power Options:

On / Off Switch

1 AC-DC Adapter

- The ARGOS lights can also connect with the power adapter.

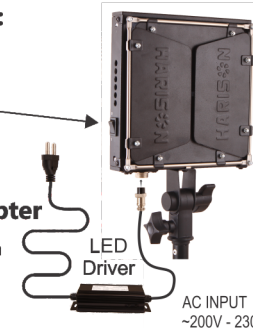


2 12V Battery

- Run your ARGOS light on a regular 12 V lead-acid battery (min current capacity 7AH)



3 Power Pak 14-Li

- The ARGOS lights can also run with the HARISON Power-Pak 14-Li.

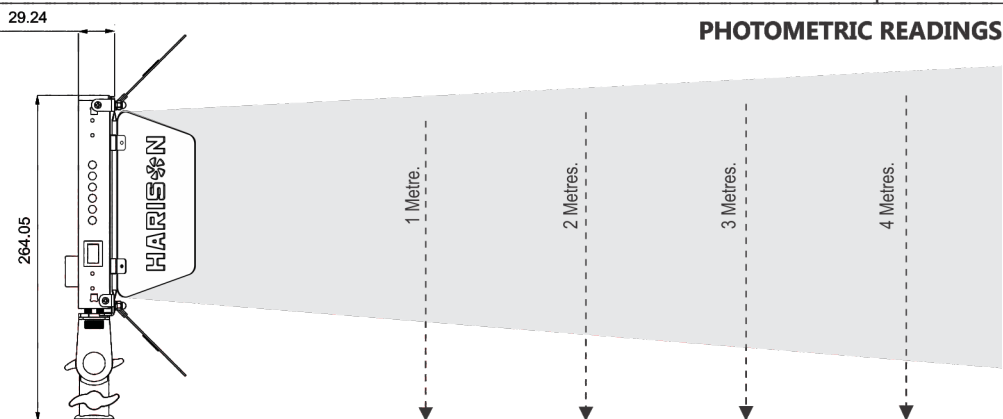

Light Model	LED Type	Distance			
		1 Mtr. (3.28 ft)	2 Mtrs. (6.56 ft)	3 Mtrs. (9.84 ft)	4 Mtrs. (13.12 ft)
Argos L-40 With Diffuser	Daylight LED	2540	670	370	150
	Daylight LED	1200	340	150	80
Argos L-40 DC With Diffuser	Tungsten LED	1020	280	130	70
	Daylight + Tungsten LED	2210	650	280	160

Note: For lux Levels without diffuser add 33%



FEATURES

- 416 pcs. True Colour LEDs.
- High CRI (>93) LEDs.
- Power: 40 Watts.
- Colour-corrected light output.
- Compact and rugged CNC-machined all-metal housing.
- With white diffuser.
- MADE IN INDIA.

For More Information



SPECIFICATIONS

Power Consumption	48 Watts
Operating Voltage:	11 to 19 Volt DC
Weight:	1.05 Kg
Dimension (cm):	18 x 27 x 3
Light Source	TrueColor LED
LED Count:	416
Light Beam Angle:	120°
Illuminance: (at 1 meter)	3300 lx
Power Variation:	Stepless 0-100%
Color Rendering Index (Ra):	>93